



ENAPART



93 S Railroad Avenue Unit C
Bergenfield NJ 07621 USA
www.enapart.com
sales@enapart.com



Via del Canneto 35,
Borgosatollo, Brescia - Italia
www.enapart.it
vendite@enapart.it



Barbaros Mah. Ihlamur Bul. Ağaoğlu
My Newwork No:3/15 Ataşehir / İstanbul
www.enapart.net
satis@enapart.net



PRIVADA 10 B SUR #3908 COL.
ANZUREZ, C.P. 72530, PUEBLA, PUE
www.enapart.com.mx
sales@enapart.com.mx



Friedrich-Ebert-Anlage 36, 60325
Frankfurt am Main, Germany
www.enapart.de
anfrage@enapart.de



4 boulevard Carnot, 95400
villiers-le-bel, Paris, France
www.enapart.fr
sales@enapart.fr



65049, ОДЕСА, ВУЛИЦЯ ІВАНА
ФРАНКА, БУДИНОК 55, ПОВЕРХ 3
www.enapart.com.ua
sales@enapart.com.ua



MUNICIPIUL BUCUREȘTI, SECTOR 3,
B-DUL BASARABIA, NR.250, CORP P+5
www.enapart.ro
sales@enapart.ro



〒584-0023 大阪府富田林市若松町
東2丁目2番16号
www.enapart.co.jp
sales@enapart.co.jp



PLAZA NUESTRA SEÑORA DE LAS
NIEVES 12 ,LOCAL ,50012,ZARAGOZA
www.enapart.es
ventas@enapart.es




Складова база „Онгъл“, Склад А2, п.к.
4006, гр. Пловдив, България
www.enapart.bg
sales@enapart.bg




3 Austin Mews, High Street, Hemel
Hempstead, HP1 3AF , United Kingdom
www.enapart.co.uk
sales@enapart.co.uk


03 Water Booster Systems





G60 Series	Model	Product Inlet Fitting	Pump Design:	Gas Inlet Fitting	Weight
	G60-1215	½" (9.52 mm) Barbed Straight Plastic (Polypropylene)	Positive Displacement, Double Diaphragm	½" (9.52 mm) Barbed Straight Plastic (Polypropylene)	1.24 lb (0.56 kg)


K56 Series	Model	Product Inlet Fitting	Pump Design:	Gas Inlet Fitting	Weight
	K56-1030	½" (12.7 mm) Barbed Straight Plastic (Polypropylene)	Positive Displacement, Double Diaphragm	½" (12.7 mm) Barbed Straight Nylon	1.24 lb (0.56 kg)

Port Fittings: **Gas Inlet & Outlet** ¼" (6.3 mm) Barbed,
Pump Product Inlet ½" (12.7 mm) Barbed, **Tank Product Outlet** ½" (12.7 mm) Barbed

2830 Series	Part Number	Description	Amp Draw:
	R28302512	230VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,5
	R28304512	230VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,5
	028300512	115VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,9
	R28304542	230VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,5
	R28303542	230VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,5
	R28302542	230VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,5
	028300542	115VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,9
	028300543	115VAC, 87 psi (6 bar), 1.5 gpm (5.7 lpm)	0,9

2840 Series	Part Number	Description
	2840-010	115 V AC, 40 PSI (2.7 bar) switch, 35 GPM (13.2 LPM)
	2840-000	115 V AC, 40 PSI (2.7 bar) switch, 4.5 GPM (17 LPM)
	2840-210	230 V AC, 40 PSI (2.7 bar) switch, 3.5 GPM (13.2 LPM)
	2840-100	12V DC, 45 PSI (3.1 bar) switch, 4.5 GPM (17 LPM)

Water Booster Accessories	Part Number	Description
	01752300C	50 PSI (3.4 bar), QD CONNECT, NO PORTS
	01752302C	50 PSI (3.4 bar), QD CONNECT, ³⁄₈" (9.5 mm) HB PORTS
	01752320C	30 PSI (2.1 bar) (2.0 bar), QD CONNECT, NO PORTS
	01752322C	30 PSI (2.1 bar) (2.0 bar), QD CONNECT ³⁄₈" (9.5 mm) HB PORTS

Pressurized Accumulator Tank	Part Number	Description
	30573-001	0.26 gallon (1 liter) accumulator tank

SELECTION GUIDE

Product Outlet	Power Source	Materials of Construction (wetted parts):	Temperature Limits	Dimensions: (Height x Width x Depth)	Displacement:	Self Priming:	Operating Pressure:	Liquid Inlet Pressure:	Flow Rate:	Approvals:
¼" (6.35 mm) CO ₂ Shutoff Brass	CO ₂ Gas, Nitrogen or Compressed Dry Filtered Air	Polypropylene, Santoprene®, EPDM, AISI 303 & 304 Stainless Steel	34° to 120° F (1.1° to 49° C)	5.27" x 3.21" x 4.58" (133.8 mm x 81.5 mm x 116.3 mm)	3.2 oz. (91 ml) per cycle	Up to 10 ft. (3.05 m)	20 psi (1.4 bar) min. / 90 psi (6.2 bar) max.	30 PSI (2.1 bar) (2.1 bar) max.	5 GPM (18.9 LPM) - Open Flow	CE, SK, NSF Standard 18

Product Outlet	Power Source	Materials of Construction (wetted parts):	Temperature Limits	Dimensions: (Height x Width x Depth)	Displacement:	Self Priming:	Operating Pressure:	Bladder Tank	Liquid Inlet Pressure:	Flow Rate:
¼" (6.35 mm) CO ₂ Shutoff Brass	CO ₂ Gas, Nitrogen or Compressed Dry Filtered Air	Polypropylene, Santoprene®, EPDM, AISI 303 & 304 Stainless Steel, Brass	34° to 120° F (1.1° to 49° C)	12" x 11.5" x 7" (304.8 mm x 292.1 mm x 177.8 mm)	3.2 oz. (91 ml) per cycle	Up to 10 ft. (3.05 m)	60 psi (4.1 bar) min. / 90 psi (6.2 bar) max.	Precharged to 20 PSI (1.4 bar)	30 psi (2.1 bar) max.	5 GPM (18.9 LPM) - Open Flow

Warranty	Inlet Size	Outlet Size	Tank Size	Plug Type
1 Year	3/8" HB	3/8" HB	1 US Gal / 3.78 Litre)	EU 2 pin
1 Year	3/8" HB	3/8" HB	1 US Gal / 3.78 Litre)	UK 3 pin
1 Year	3/8" HB	3/8" HB	1 US Gal / 3.78 Litre)	US 2 pin
1 Year	3/8" HB	3/8" HB	4US Gal / 15 litre	UK 3 pin
1 Year	3/8" HB	3/8" HB	4US Gal / 15 litre	Australia 2 pin
1 Year	3/8" HB	3/8" HB	4US Gal / 15 litre	EU 2 pin
1 Year	3/8" HB	3/8" HB	4US Gal / 15 litre	US 2 pin
1 Year	3/8" HB	1/2" HB	4US Gal / 15 litre	US 2 pin

Amp Draw:	Motor:	Warranty:	Inlet and Outlet Ports:
115 Volt AC: 1.5 amps max., 230 Volt AC: 0.75 amps max.	Permanent Magnet TENV	1 Year	½" (13 mm) OD or 3/4" (19 mm) OD hose barb
115 Volt AC: 1.5 amps max., 230 Volt AC: 0.75 amps max.	Permanent Magnet TENV	1 Year	½" (13 mm) OD or 3/4" (19 mm) OD hose barb
115 Volt AC: 1.5 amps max., 230 Volt AC: 0.75 amps max.	Permanent Magnet TENV	1 Year	½" (13 mm) OD or 3/4" (19 mm) OD hose barb
115 Volt AC: 1.5 amps max., 230 Volt AC: 0.75 amps max.	Permanent Magnet TENV	1 Year	½" (13 mm) OD or 3/4" (19 mm) OD hose barb

Pressurized Mini Accumulator Tank

Part Number Description



30573-0002B	0.1 gallon (½ liter) accumulator tank (rubber valve)
30573-0012B	1 gallon (½ liter) accumulator tank (metal valve)

Pressurized Large Accumulator Tank

Part Number Description



18810-0000	1 gallon (3.8 liter) accumulator tank
20799-000A	0.60 gallon (2.27 liter) accumulator tank

04 Bottled Water Systems



BW5000 Series



APPLICATIONS

- Designed for dispensing bottled water to coffee machines, beverage dispensers, vending machines and carts.
- For remote locations where water supply is inaccessible

FEATURES AND BENEFITS

- Illuminated On/Off Switch: Provides clear visibility in dark or hard-to-reach places
- Long-Life Motor: Ensures years of reliable operation
- Flojet Diaphragm Pump: Runs dry without damage, extending pump life
- Quick Connect Port: Speeds installation and replacement of suction and discharge tubing
- Quiet Operation: Minimizes noise pollution with noise-dampening rubber feet
- Thermal Overload Protection: Prevents overheating, protecting the pump and control box from damage

KITS

- Dual inlet suction kits (convert single inlet to dual inlet) PN# 21000633A
- Single inlet suction hose replacement kit PN# 21000006B
- Dual inlet suction kits (convert single inlet to dual inlet) PN# 21000633A
- Auxiliary suction tube (no float) replacement kit PN# 21000596C

STANDARD MODEL NUMBERS

MODEL #	VAC	PLUG
SINGLE INLET		
BW5000-000A	115 VAC	US Plug
BW5001-000A	100-240 VAC	No Plug
BW5002-000A	230 VAC	AUS Plug
BW5003-000A	230 VAC	UK Plug
BW5004-000A	230 VAC	SHUKO Plug
DUAL INLET		
BW5020-000A	115 VAC	US Plug
BW5022-000A	230 VAC	AUS Plug
BW5023-000A	230 VAC	UK Plug
BW5024-000A	230 VAC	SHUKO Plug



05 Electric Bag-in-Box Pumps



Bag in Box is a common, economical system for distributing drinks into the market. It is used worldwide and, because Flojet are a leading supplier of pumps to dispense all BIB liquids, we have a strong understanding of how to transfer your drinks from the BIB to the customer.

BevJet 5000 Series



FLOJET'S NEW BEVJET®

➤ Bag-In-Box Dispense System is designed for dispensing wine, juice, teas or liquor with alcohol content less than 15%. BEVJET® is ideal for beverage dispensing requiring frequent tube changes. The product dispenses safely through NSF Alcohol approved tubing and cleaning is as simple as replacing a tube. BEVJET senses when beverage box is empty and automatically shuts down. It restarts automatically when full supply is reconnected. The compact design enables mounting in tight spaces such as cabinets, carts, or most other under counter situations.

FEATURES AND BENEFITS

- Attractive appearance, can be installed anywhere.
- Vacuum switch - automatically shuts down the unit when the bag is empty and restarts the unit when a new bag is attached.
- NSF certification - ensures compliance with approved piping and fittings.
- Clearly identified "In" and "Out" ports with quick disconnects allow hose replacements in seconds.
- Flojet electric diaphragm pumping technology - ensures run dry capability, allowing for a long, trouble free service life.
- Thermal protection - avoiding costly service fees and peace of mind.
- Long life motor - outperforms many competitors by 400%.

STANDARD MODEL NUMBERS

MODEL NUMBER	VOLTAGE	FLOW RATE	MAX PRESSURE	POWER ADAPTER TYPE	COMPLIANCE
BIB5000A	115V	0.6 GPM (2.27 LPM)	40 psi (2.76 bar)	US Plug	NSF, UL
BIB5002A	230V	0.6 GPM (2.27 LPM)	40 psi (2.76 bar)	AU Plug	NSF, CE RoHS
BIB5003A	230V	0.6 GPM (2.27 LPM)	40 psi (2.76 bar)	UK Plug	NSF, CE RoHS
BIB5004A	230V	0.6 GPM (2.27 LPM)	40 psi (2.76 bar)	EU Plug	NSF, CE RoHS

2125 Series



APPLICATIONS

- Designed for dispensing Bag-in-Box syrups, juice concentrate (without pulp or particulate), teas, Bag-in-Box wines and liquor
- Ideal for use in mobile carts and vending applications, where CO₂ is not available

SPECIAL FEATURES

- Built-in vacuum switch shuts off pump when bag is empty. When full bag is connected, pump will restart automatically
- Pressure switch allows pump to turn on and off automatically when dispensing valve is opened or closed
- Self-priming up to 6 ft. (1.8 m)
- Runs dry without damage

STANDARD MODEL NUMBERS

MODEL NUMBER	VOLTAGE	PRESSURE SWITCH	OPERATIONAL
2125-030	115 Volt AC	50 psi max.	1 oz./sec. (3.4 bar) (29.5 ml./sec.)
2125-507	115 Volt AC	90 psi max.	0.5 oz./sec. (6.2 bar) (14.8 ml./sec.)
2125-230	230 Volt AC	50 psi max.	1 oz./sec. (3.4 bar) (29.5 ml./sec.)
2125-508	230 Volt AC	90 psi max.	0.5 oz./sec. (6.2 bar) (14.8 ml./sec.)

SPECIFICATIONS

PUMP DESIGN:	Double diaphragm
PORTS:	¼" (6.3 mm) NPT, female
MOTOR:	Permanent magnet with solid state rectifier
CYCLES:	50/60 Hz
RECOMMENDED DUTY CYCLE:	25%
APPROVALS:	NSF Standard 18 UL listed
WARRANTY:	1 Year

Note: Not available in Europe.

Note: If inlet exceeds 30 PSI (2.1 bar), pump requires 30 PSI (2.1 bar) water pressure regulator.

BevJet Compact



Bag-In-Box Dispense System is designed for dispensing wine, juice, teas or liquor.

MAIN FEATURES & BENEFITS BEVJET SERIES

- Quick, simple and easy to install
- NSF Certification, ensures compliance in typical beverage applications
- Quick disconnect ports, allows hose replacement in seconds and a range of options
- Built in shut-off, automatically shuts down the unit when the bag is empty run-dry technology and thermal protection, providing peace of mind & avoiding costly service calls
- Self Priming to allow mounting away from the beverage source

BEVJET COMPACT

- In addition to the main features, the BevJet Compact includes an easily accessible switch to restart when the beverage runs out and is more compact to allow fitting in most locations

BEVJET COMPACT BASE UNIT

MODEL NUMBER	VAC	PLUG
BLC1011-000A	115 VAC	US PLUG
BLC2011-000A	230 VAC	UK PLUG
BLC3011-000A	230 VAC	EU PLUG
BLC4011-000A	230 VAC	AU PLUG
BLC5011-000A	100-240 VAC	NO PLUG

06 General Pumps



Triplex Series High Pressure Pump

APPLICATIONS

- Water Booster
- Water Purification
- Espresso Brewing
- Carbonation

SPECIAL FEATURES

- Available pressures up to 150 psi (10.3 bar)
- Pump is sealed in corrosion resistant material, thus offering unparalleled performance and life
- Bypass System eliminates pulsation and cycling
- Latest co-injection mold diaphragm technology reduces potential leak paths
- No metal parts on wetted area



NEW STANDARD MODEL NUMBERS

MODEL NUMBER	DESCRIPTION
03811133	12 VDC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
03811143	12 VDC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
03811033	115VAC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
03811043	115VAC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
03811233	230VAC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
03811243	230VAC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
R3711143	12 VDC 100 PSI (6.9 bar) 1.4 GPM (5.3 LPM)
R3711343	24 VDC 100 PSI (6.9 bar) 1.4 GPM (5.3 LPM)
R3711243	230VAC 100 PSI (6.9 bar) 1.4 GPM (5.3 LPM)
R3811143	12 VDC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
R3811343	24 VDC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)
R3811243	230VAC 150 PSI (10.3 bar) 1.4 GPM (5.3 LPM)

SPECIFICATIONS

MOTOR DESIGN (PMDC) AC:	Perm. Magnet TENV (non-ventilated)
VOLTAGES:	115, 230V AC, 12VDC and 24VDC
AMP DRAW:	1.2 Amps Max for 115VAC
PUMP HEAD:	Glass Filled Nylon
ELASTOMERS DIAPHRAGM:	Santoprene®
CHECK VALVES:	EPDM or Viton®
MAX. FLOW RATE:	1.4GPM (5.3LPM)
MAX. PRESSURE:	150 PSI (10.3 Bar)
DUTY CYCLE:	Intermittent*
WEIGHT:	7.6 lb (3.5 Kg)
PORT SIZE INLET / OUTLET:	3/8" NPTF
APPROVALS:	CE, NSF components

07 Beverage Solenoid Pumps

**NEW**

PS Series Oscillating Pumps

Building on our extensive experience in positive displacement pumps, Flojet's new PS Series Oscillating pumps provide a compact solution for low flow, high pressure applications.

Features.

- Pump Design: Oscillating Pump
- Outlet Port: 1/8" BSP - NPT Optional
- Inlet Port: 1/4" Hose Barb - BSP/NPT Optional
- Coil: Insulation Class II / Thermal Class "F"
- Body Material: Polyamide (Brass Optional)
- Seal Material: NBR / HNBR
- Regulatory: CE, UL, VDE

Performance data.

- Nominal Voltage: 110 / 230 VAC
- Liquid Temperature: Maximum 95°F (35°C)
- Pressure Rating: Up to 19 bar (276 psi)
- Flow Rating: Up to 1200 cm³/min (0.32 gal/min)

Typical applications.

- Espresso Coffee Makers
- Floor Care Machines
- Steam Irons
- Steam Generators
- Steam Cleaning Systems
- Medical Appliances
- Water Dispensers
- Air Conditioners
- Cooling Systems



Data table.


Part No.	Max. Pressure Rating (bar)	Max. Pressure Rating (psi)	Max. Flow (cm³/min)	Max. Flow (gallon/min)	Voltage (VAC)	Frequency (Hz)	Port / Elastomer Material
PS0311	3	44	1200	0.32	120	60	NBR
PS0321	3	44	1200	0.32	230	50	NBR
PS0411	4	58	950	0.25	120	60	NBR
PS0421	4	58	950	0.25	230	50	NBR
PS0711	7	102	1000	0.26	120	60	NBR
PS0721	7	102	1000	0.26	230	50	NBR
PS1511	15	218	650	0.17	120	60	NBR
PS1521	15	218	650	0.17	230	50	NBR
PS2011	19	276	420	0.11	120	60	NBR
PS2021	19	276	420	0.11	230	50	NBR

Accessories.

Part No.	Description
PSA0100	Inlet Elbow Hose Adapter
PSA0101	Inlet Adapter - 1/8"
PSA0200	Rubber Pump Mount - PVC - < 50° C
PSA0201	Rubber Pump Mount - SEBS - < 100° C

Extensive range of other accessories available on request.
Please contact your local xylem sales office.

Nomenclature.

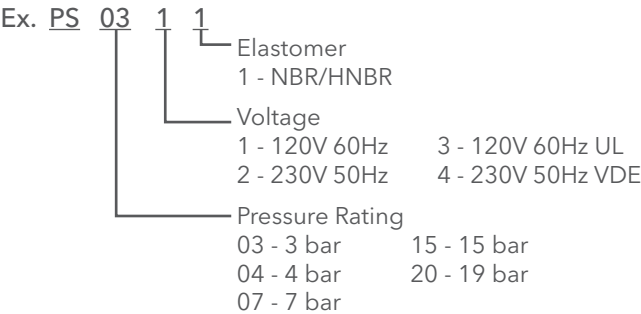

08 Filtration

C Series Water Filtration Range

Features.

- Compact
- Best lifetime cost per gallon
- Expandable
- Easy and fast to service/change out
- High flow rates - up to 5 GPM through 1 head
- Retrofit models available
- Optional scale inhibitor available
- Optional chloramine reduction available

Applications.

Hot & Cold Beverage and Ice machines

C1-2500000

Applications.

for sediment, chlorine taste & odor reduction in Single Carbonators

CAPACITY.	37,850 (Litres) 10,000 (Gallons)
MICRON RATING.	1
LENGHT.	349 (mm) 13-4/4 (inches)
DIAMETER.	3-5/16 (inches) 83 (mm)



C1-2510000

Applications.

ice machines.

CAPACITY.	37,850 (Litres) 10,000 (Gallons)
MICRON RATING.	1
LENGHT.	330,2 (mm) 13-3/4 (inches)
DIAMETER.	76,2 (mm) 3-5/1 (inches)



C1-3500000

Applications.

for sediment, chlorine taste & odor reduction in Single Carbonators

CAPACITY.	47,696 (Litres) 12,600 (Gallons)
MICRON RATING.	1
LENGHT.	455 (mm) 17-15/16 (inches)
DIAMETER.	3-5/16 (inches) 83 (mm)



C1-4500000

Applications.
for sediment, chlorine taste & odor reduction in Single Carbonator with non-carb dispenser

CAPACITY.	94,635 (Litres) 25,000 (Gallons)
MICRON RATING.	5
LENGHT.	298 (mm) 11-3/4 (inches)
DIAMETER.	4-7/16 (inches) 114 (mm)



C1-9500000

Applications.
for sediment, chlorine taste & odor reduction in Triple Carbonators

CAPACITY.	204,390 (Litres) 54,000 (Gallons)
MICRON RATING.	3
LENGHT.	527 (mm) 20-3/4 (inches)
DIAMETER.	4-7/16 (inches) 114 (mm)



C1-9520000

Applications.
for sediment, chloramines, chlorine taste & odor reduction in Triple Carbonators

CAPACITY.	Chlorine 454,249 Chloramine 113,550 (Litres) Chlorine 120,000 Chloramine 30,000 (Gallons)
MICRON RATING.	3
LENGHT.	527 (mm) 20-3/4 (inches)
DIAMETER.	4-7/16 (inches) 114 (mm)



C2-3510000

Applications.
for sediment, chlorine taste & odor reduction in Single Carbonators

CAPACITY.	47,696 (Litres) 12,600 (Gallons)
MICRON RATING.	1
LENGHT.	365 (mm) 14.375 (inches)
DIAMETER.	3.375 (inches) 86 (mm)



C1-6500000

Applications.
for sediment, chlorine taste & odor reduction in Twin Carbonators

CAPACITY.	132,489 (Litres) 35,000 (Gallons)
MICRON RATING.	3
LENGHT.	375 (mm) 14-3/4 (inches)
DIAMETER.	4-7/16 (inches) 114 (mm)



C1-6520000

Applications.
for sediment, chloramines, chlorine taste & odor reduction in Twin Carbonators

CAPACITY.	Chlorine 264,980 Chloramine 26,498 (Litres) Chlorine 70,000 Chloramine 7,000 (Gallons)
MICRON RATING.	3
LENGHT.	375 (mm) 14-3/4 (inches)
DIAMETER.	4-7/16 (inches) 114 (mm)



C2-3500000

Applications.
for sediment, chlorine taste & odor reduction in Single Carbonators

CAPACITY.	47,696 (Litres) 12,600 (Gallons)
MICRON RATING.	1
LENGHT.	365 (mm) 14.375 (inches)
DIAMETER.	3.375 (inches) 86 (mm)



HN3-12B000 and HN3-12N000








Filter Head with gauge port

FLOW RATE	5 (gpm) 18.9 (lpm)
PORT TYPE	1/2 BSP or 1/2 NPT



09 Accessories & Fittings


Mounting Brackets

PART NUMBER	DESCRIPTION AND FEATURES
20982-100A 	UNIVERSAL BRACKET <ul style="list-style-type: none">• For use with N & T Series, G Series and Shurflo®, air driven pumps• Single brackets snap together easily for multiple pump installations• Ideal for mounting on BIB rack or wall
21000-255B 	TRANSFER VALVE MOUNTING BRACKET (12 PK.) <ul style="list-style-type: none">• For mounting transfer valve onto N & T Series pump or on 8 Pump• Stainless Steel Mounting Panel
21000-296A 	FOUR PUMP PLASTIC MOUNTING BRACKET <ul style="list-style-type: none">• For use with all G Series pumps• Ideal for mounting on BIB rack or wall
11028-008 	EIGHT PUMP STAINLESS STEEL MOUNTING PANEL <ul style="list-style-type: none">• For use with N & T Series pumps• Mounting positions available for air regulators and transfer valves
21000-563 	90° SLIDE BRACKET <ul style="list-style-type: none">• Mounted on a 90° angle• Allows quick mounting of pump to 90° angle style mounting systems
11028-508 	THREE PUMP METAL MOUNTING BRACKET <ul style="list-style-type: none">• For use with N & T Series pumps• Bracket can be mounted vertically or horizontally• Black enamel finish resists corrosion• Ideal for mounting on BIB rack or wall
20272-002B 	SLIDE TRACK BRACKET <ul style="list-style-type: none">• For use with N & T Series air driven pump• Allows quick mounting of pump to slide-in style mounting systems

Transfer Valves

General Information

VALVE HIGHLIGHTS

- Automatically changes from empty to full bag without interrupting flow
 - Can operate multiple banks of BIB, horizontally
 - Label indicates which BIB is “on-line”
 - Can be mounted in any position
 - Can be manually operated
- 

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
1500-030	Regular-automatic switching @ 16" (406.4 mm) (+ or - 2"(50.8mm)) Hg.
1500-130	Regular with swivel elbow fittings
1500-031	High altitude, 3,000+ ft. (900+ m); automatic switching @ 11"(279.4 mm) - 14'(4.3 m) Hg.
1500-131	High altitude with swivel elbow fittings
1500-050	Regular-automatic switching @ 16"(406.4mm) Hg, ½" ports


SPECIFICATIONS

DESIGN:	Vacuum Operated, Snap Action Diaphragm
CONNECTIONS:	¾" (9.5 mm) Hose Barb
APPROVALS:	NSF Standard 18

Syrup Sold Out Switch

General Information

SPECIAL FEATURES

- Illuminates “sold out” light to indicate empty BIB and temporarily disables dispensing valve
- 

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
2095-502	Syrup Sold Out Switch, for ¼" (6.3 mm) ID tubing
2095-540	Syrup Sold Out Switch, for ¾" (9.5 mm) ID tubing

SPECIFICATIONS

DESIGN:	Pressure/Electrical Operation
PRESSURE SWITCH:	Opened 20 psi (1.4 bar), Closed 13 psi (0.9 bar). Normally open
VOLTAGE:	24 Volt AC power
CYCLE:	50/60 Hz
CONNECTIONS:	¼" (6.3 mm) OD or ¾" (9.5 mm) OD hose barbed
APPROVALS:	NSF Standard 18, UL listed

Auto Shut Off


General Information

APPLICATIONS

- For use with T5000 Series pumps
- Automatically shuts off pump when BIB bag is empty
- NSF Standard 18

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
20308-130	Auto shutoff valve, ¼" (6.3 mm) plastic straight CO ₂ shutoff valve
20308-131	High altitude auto shutoff valve, ¼" (6.3 mm) plastic straight CO ₂ shutoff valve



Vacuum Switch

General Information

APPLICATIONS

- Signal ‘sold out’ situation in BIB suction lines
- 0.375" Barbed connections
- Normally open contacts

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
02095116	KIT VAC SW (N/O) .375 BASE switching @ 16 " Hg + or - 2" Hg

Gas Pump Liquid Fittings



STAINLESS STEEL PRODUCT INLETS & OUTLETS

For use with

N, T, G55, G5A, G58 AND LF PLUS SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
20324-030	¼" (6.3 mm) Hose Barb, Straight
20325-030	¾" (9.5 mm) Hose Barb, Straight
20606-100	½" (12.7 mm) Hose Barb, Straight
20607-100	¼" (6.3 mm) Hose Barb, Elbow
20608-100	¾" (9.5 mm) Hose Barb, Elbow




For use with

G56 AND K56 SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
21000-131A	¼" (6.3 mm) Hose Barb, Straight
221000-130A	¾" (9.5 mm) Hose Barb, Straight




Plastic Product Outlet & Inlets

For use with

N, T, G55, G5A, G58 AND LF PLUS SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
20325-031	¾" (9.5 mm) Hose Barb, Straight






For use with

ALL G56 SERIES AND K56 SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
20381-026	10-13mm (¾"-½") Hose Barb, Straight
20381-002	½" (12.7 mm) Hose Barb, Straight
20381-024	10-13mm (¾"-½") Hose Barb, Elbow
20381-009	½" (12.7 mm) Hose Barb, Elbow



Gas Pump Air Fittings



BRASS CO₂/AIR INLETS WITH SHUTOFF VALVE

For use with

ALL N5000 SERIES AND G SERIES PUMPS

STANDARD MODEL NUMBERS


PART NUMBER	DESCRIPTION
1510-000	¼" (6.3 mm) Hose Barb, Straight
1520-000	¼" (6.3 mm) Hose Barb, Tee
1521-000	¼"(6.3 mm) Hose Barb, Elbow



Offset Brass CO₂/Air Inlets W/Shutoff Valve

APPLICATIONS

- Facilitates manifolding CO₂ lines of multi-pump kits, when pumps are mounted vertically.
- Eliminates obstruction of CO₂/airlines by fluid lines or ports.



STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
91010-002	¾" NPT Male x ¾" (9.5 mm) Barb
91010-004	¼" NPT Male x ¾" (9.5 mm) Barb
91010-006	¾" NPT Male x ½" (12.7 mm) Barb
91010-032	¾" NPT Male x ¼" (6.3 mm) Barb
91010-053	¼" NPT Male x ¼" (6.3 mm) Barb

Plastic CO₂/Air Inlets

For use with

ALL N5000 SERIES AND G SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
20325-033	¼" (6.3 mm) Hose Barb, Straight



John Guest Fittings

PRODUCT INLET AND OUTLET FITTINGS



For use with

N, T, G55, G5A, G58 AND LF PLUS SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
21000-231B	For use with ¼" (6.3 mm) O.D. Tubing
21000-232B	For use with ⅜" (9.5 mm) O.D. Tubing

* Packaged 12 per bag






For use with

G56 AND K56 SERIES PUMPS

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
21000-228B	For use with ¼" (6.3 mm) O.D. Tubing
21000-229B	For use with ⅜" (9.5 mm) O.D. Tubing
21000-230B	For use with ½" (12.7 mm) O.D. Tubing

* Packaged 12 per bag





For use with

ALL N5000 SERIES AND G SERIES PUMP

STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
21000-233B	Plastic Fitting, for use with ¼" (6.3 mm) OD tubing
21000-234B	Brass CO ₂ Fitting with shutoff, for use with ¼" (6.3 mm) O.D. tubing


* Packaged 12 per bag



Electric Fittings

For use with

ALL DUPLEX II AND 2820 SERIES (⅜" NPT ONLY) AND 2125 SERIES PUMPS (¼" NPT ONLY)




STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
91010-001	⅜" NPT Male x ⅜" (9.5 mm) Barb
91010-003	¼" NPT Male x ⅜" (9.5 mm) Barb
91010-005	⅜" NPT Male x ½" (12.7 mm) Barb
91010-033	⅜" NPT Male x ¼" (6.3 mm) Barb
91010-052	¼" NPT Male x ¼" (6.3 mm) Barb

Nylon Barbed Straight

For use with

ALL DUPLEX II AND 2820 SERIES (⅜" NPT ONLY) AND 2125 SERIES PUMPS (¼" NPT ONLY)



STANDARD MODEL NUMBERS

PART NUMBER	DESCRIPTION
91010-002	⅜" NPT Male x ⅜" (9.5 mm) Barb
91010-004	¼" NPT Male x ⅜" (9.5 mm) Barb
91010-006	⅜" NPT Male x ½" (12.7 mm) Barb
91010-032	⅜" NPT Male x ¼" (6.3 mm) Barb
91010-053	¼" NPT Male x ¼" (6.3 mm) Barb

Xylem ['zīləm]

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to www.xylem.com

FLOJET



foodservice.xylem.com

CHINA
32/F Tower A, Hongqiao City
Centre of Shanghai,
100 Zunyi Road,
Shanghai 200051, China
Tel: (86)21 2208 2888
Fax: (86)21 2208 2999

GERMANY
Oststraße 28,
22844 Norderstedt, Germany
Tel: +49 (0) 40 53 53 730
Fax: +49 (0) 40 53 53 73 11

ITALY
Via Tommaseo, 6, 20059
Vimercate, Milano, Italy
Tel: +39 039 6852323
Fax: +39 039 666307

UNITED STATES
SA - West Coast
17942 Cowan,
Irvine, CA 92614
Tel: +1 949 608 3900
Fax: +1 949 608 3888



Xylem
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
United Kingdom
Tel: +44 (0)1992 450145
Fax: +44 (0)1992 467132
www.xyleminc.com

Flojet is a trademark of Xylem Inc. or one of its subsidiaries.
© 2016 Xylem

ACCURACY AND COMPLETENESS OF INFORMATION
All information in this literature regarding products and services provided by Flojet is subject to change without prior notice. Reasonable efforts are taken to ensure the accuracy and integrity of all information provided here, but Flojet is not responsible for misprints, out-of-date information, or errors. Flojet makes no warranty, express or implied, or assumes any legal liability or responsibility for the accuracy or completeness of any information contained in this literature.