

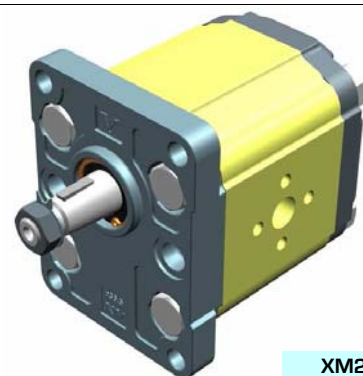
reversible motor - series XV

STANDARD EUROPEAN MOTOR
ø36.5 FLANGE - TAPER SHAFT

XV-2M

X 2 M 51 01 E P P E

Series	X	series XV
Group	2	group 2
Category	M	reversible motor
Displacement	51	17
Flange	01	Ø36.5 STANDARD EUROPEAN reversible rotation
Shaft	E	CO001 - Tapered 1:8 - ø17.4 - M12x1.5 - key thk.4
Body	IN	P inlet - Ø40 Ø20 M8
	OUT	P outlet - Ø40 Ø20 M8
Cover	E	with external drainage



XM201

Technical data table

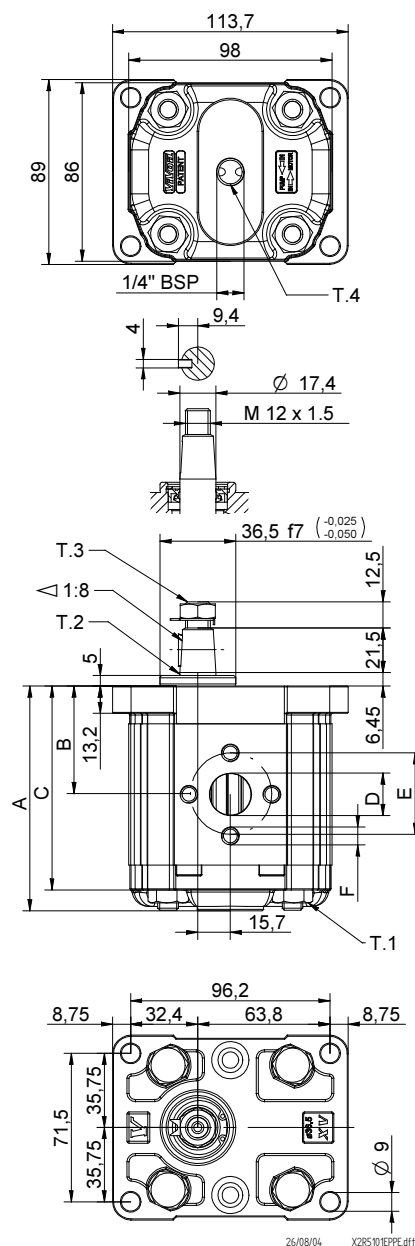
TYPE	Displacement	Max. Pressure		CODE							
	cm ³ /rev	P1 bar	P3 bar	External drainage				Internal drainage			
XV-2M/04	4,20	260	300	X	2	M	41 01 E O O E	X	2	M	41 01 E O O F
XV-2M/06	6,00	260	300	X	2	M	43 01 E O O E	X	2	M	43 01 E O O F
XV-2M/09	8,40	260	300	X	2	M	45 01 E O O E	X	2	M	45 01 E O O F
XV-2M/11	10,80	260	300	X	2	M	47 01 E O O E	X	2	M	47 01 E O O F
XV-2M/14	14,40	250	290	X	2	M	49 01 E P P E	X	2	M	49 01 E P P F
XV-2M/17	16,80	230	270	X	2	M	51 01 E P P E	X	2	M	51 01 E P P F
XV-2M/19	19,20	210	250	X	2	M	53 01 E P P E	X	2	M	53 01 E P P F
XV-2M/22	22,80	200	240	X	2	M	55 01 E P P E	X	2	M	55 01 E P P F
XV-2M/26	26,20	170	210	X	2	M	57 01 E Q P E	X	2	M	57 01 E Q P F
XV-2M/30	30,00	160	200	X	2	M	59 01 E Q P E	X	2	M	59 01 E Q P F
XV-2M/34	34,20	150	190	X	2	M	61 01 E Q P E	X	2	M	61 01 E Q P F
XV-2M/40	39,60	140	180	X	2	M	63 01 E Q P E	X	2	M	63 01 E Q P F

P1) Max. working pressure - P3) Max. peak pressure

For heavy-duty applications, it is recommended to check the admissible torque of the shaft

Dimensions table

TYPE	Weight	A	B	C	D	E	F	D	E	F
	kg	mm	mm	mm	IN			OUT		
XV-2M/04	2,200	87,2	41,7	77,2	ø13,5	30	M6x1	ø13,5	30	M6x1
XV-2M/06	2,300	90,2	43,2	80,2	ø13,5	30	M6x1	ø13,5	30	M6x1
XV-2M/09	2,400	94,2	45,2	84,2	ø13,5	30	M6x1	ø13,5	30	M6x1
XV-2M/11	2,500	98,2	47,2	88,2	ø13,5	30	M6x1	ø13,5	30	M6x1
XV-2M/14	2,700	104,2	50,2	94,2	ø20	40	M8X1,25	ø20	40	M8X1,25
XV-2M/17	2,800	108,2	52,2	98,2	ø20	40	M8X1,25	ø20	40	M8X1,25
XV-2M/19	2,900	112,2	54,2	102,2	ø20	40	M8X1,25	ø20	40	M8X1,25
XV-2M/22	3,050	118,2	57,2	108,2	ø20	40	M8X1,25	ø20	40	M8X1,25
XV-2M/26	3,150	122,2	59,2	112,2	ø23,5	40	M8X1,25	ø20	40	M8X1,25
XV-2M/30	3,400	130,2	63,2	120,2	ø23,5	40	M8X1,25	ø20	40	M8X1,25
XV-2M/34	3,600	137,2	66,7	127,2	ø23,5	40	M8X1,25	ø20	40	M8X1,25
XV-2M/40	3,800	146,2	71,2	136,2	ø23,5	40	M8X1,25	ø20	40	M8X1,25



T.1 = 54÷58.9 [Nm] - screw tightening torque M10

T.3 = 40 [Nm] - torque wrench setting 19
















T.2 = 233.2 [Nm] - admissible shaft torque (N.B. When choosing a shaft, always check the admissible torque).

T.4 = 0.3÷0.5 bar - max. drainage pressure

Table of variations

XV-2M

ø36.5 FLANGE

ø36.5 FLANGE				Shaft		Cover				
	01	CI001 - Parallel T.2 = 44.1 [Nm]	A	CI002 - Parallel T.2 = 67.5 [Nm]	B		E			
										
	04	CO001 - Tapered T.2 = 233.2 [Nm]	E	CO002 - Tapered T.2 = 233.2 [Nm]	F		F			
										
	05	SCF02 - Splined T.2 = 86.1 [Nm]	G	SCF03 - Splined T.2 = 86.1 [Nm]	H		K			
										
		SCF04 - Splined T.2 = 67.1 [Nm]	I	SCF01 - Splined T.2 = 86.2 [Nm]	L		L			
										
							P			
								Flange drainage		



















Displacement	
TYPE	CODE
XV-2M/04	41
XV-2M/06	43
XV-2M/09	45

Standard bodies					
Displacement cm3/rev	Standard threads				
4	O - O	R - R	B - B	Z - Z	
6	O - O	R - R	B - B	Z - Z	
9	O - O	R - R	B - B	Z - Z	

Displacement	
TYPE	CODE
XV-2M/04	41
XV-2M/06	43
XV-2M/09	45
XV-2M/11	47
XV-2M/14	49
XV-2M/17	51
XV-2M/19	53
XV-2M/22	55
XV-2M/26	57
XV-2M/30	59
XV-2M/34	61
XV-2M/40	63

Standard bodies				
Displacement cm3/rev	Standard threads			
4	O - O	R - R	B - B	Z - Z
6	O - O	R - R	B - B	Z - Z
9	O - O	R - R	B - B	Z - Z
11	O - O	R - R	B - B	Z - Z
14	P - P	R - R	C - C	Z - Z
17	P - P	R - R	C - C	Z - Z
19	P - P	R - R	C - C	Z - Z
22	P - P	R - R	C - C	Z - Z
26	Q - P	S - S	D - D	Z - Z
30	Q - P	S - S	D - D	Z - Z
34	Q - P	S - S	D - D	Z - Z
40	Q - P	S - S	D - D	Z - Z

Table showing standard flange and thread combinations available in stock

Body (threads/flanges)											
	A		B		C		D		E		F
	H		I		L		M		N		O
	Q		R		S		T		U		V
										Closed Body	
										Z	