

"SL" Hydrostatic Level Transmitter

Introduction

Anderson-Negele's "SL" Level Transmitter is the latest innovation for measuring liquid level in sanitary applications. The "SL" Transmitter incorporates state of the art design to provide superior accuracy and long term signal stability. The field tested performance of the "SL" transmitter means the elimination of expensive, repetitive re-calibrations along with protection against costly overflow/run-dry situations that can occur with less stable level transmitters. The 0.2% accuracy experienced at installation can now be expected a year later!

We've also incorporated a field calibration feature that provides "one-touch" sensor zeroing as well as simple range calibration, without the need for special tools and fixtures, pressure sources, or removal of the transmitter from the tank. This translates to real cost savings during installation or when adjusting for new application requirements. With the addition of our standard quick disconnect receptacles; we have even extended our two-year warranty to cover water ingress.

Of course the "SL" Transmitter is available in all standard fitting and range combinations you'll need to fit any sanitary tank application. All variations are CE compliant, meet applicable 3-A Sanitary Standards, and are backed by a 2-year warranty.

Authorizations



Authorizations



Features

- Fewer tune-ups
 - No more overflows
 - More reliable inventories
 - 3-A compliant; Third party verified
- Special Features Include:
- Quick Disconnect Receptacles with optional Field Wiring Connectors
 - One-Touch Field Calibration
 - Available with Hart Communication

Applications

- Inventory Control
- Batching/Mixing Control
- Both Conductive and Non Conductive Fluids

Specifications

PERFORMANCE

Level Measurement

Ranges: (Factory calibrated at no charge and easily field calibrated within the parameters listed below)

	Minimum	Maximum (URL*)	Proof Pressure
SL1 & SL5 Series	0-30 " w.c.**	0-140 " w.c.	10 psig
SL2 & SL6 Series	0-140.1 " w.c.	0-415 " w.c.	30 psig
SL3 & SL7 Series	0-415.1 " w.c.	0-830 " w.c.	60 psig
SL4 & SL8 Series	0-830.1 " w.c.	0-1385 " w.c.	100 psig

Ranges to accomodate vacuum available on request

Calibrated Accuracy: (includes repeatability, hysteresis, and linearity)
± 0.20% of URL at stable calibration temperature

Calibration Stability: Within ±0.2% of URL for one (1) year minimum

Resolution: Infinite

Process Temperature

Limits: 0°F to 265°F (-18°C to 130°C)***

Ambient Temperature

Limits: 15°F to 120°F (-9°C to 49°C)

Compensated Temp.

Range: 0°F to 250°F (-18°C to 121°C) (process)

Temperature Stability: ±0.2% of Upper Range Limit (URL) per 10°F (5.5°C)

Over-Range Capacity: 2 times the URL (see table above)

Response Time: 526 mSec

COMMUNICATION

Standard: Analog, 4-20mA output

Optional: Analog + Hart digital protocol.
Does not support Multidrop mode

POWER SIGNAL

Loop Power

Excitation: 24 VAC (12-36 vdc)

Input Current Rating: 35mA

Output: 4-20mA dc, 2-wire. Internal test points supplied

Loop Resistance: 1550 ohms (max.) at 40 vdc, 750 ohms (max) at 24 vdc

Cable Recommended: 2 conductor, stranded, 18-24 AWG, shielded with ground.

0.17 - 0.26" Cable Sheath OD for use with field wiring connector.

Anderson molded cord set recommended for best EMI and water protection.

Receptacle: 5-pin M12 Quick Disconnect Receptacle

MATERIALS/CONSTRUCTION

Housing Material: 304 and 316 stainless steel finished to 25Ra max

Wetted Parts: 316L stainless steel finished to 25Ra max

Enclosure Protection: Designed and factory tested to NEMA 4X, IP66, IP67; Suitable for use in wet locations at up to 100% relative humidity.

AGENCY APPROVALS

Electromagnetic Compatibility (EMC): Fully CE Compliant when equipped with shielded molded cord set

Standards: 3-A compliant; Third Party Verified

Designed and manufactured to sound engineering practices in accordance with Article 3.3 of the PED 97/23/EC

ETL Listed

Conforms to UL Std 61010-1 3rd Ed(with Hart options)

Certified to CSA Std C22.2 61010-1 3rd Ed(with Hart options)

Warranty:

All units are covered by a two (2) year warranty against defects in material and workmanship when installed and maintained according to the instruction manual provided


* URL = Upper Range Limit

** w.c. = water column


*** 0 °F to 250 °F (-18 °C to 121 °C) for fitting options 088, 089, 090, and 091.

Electrical Connections and Wiring Options


0.17-0.26" Cable Sheath Diameter

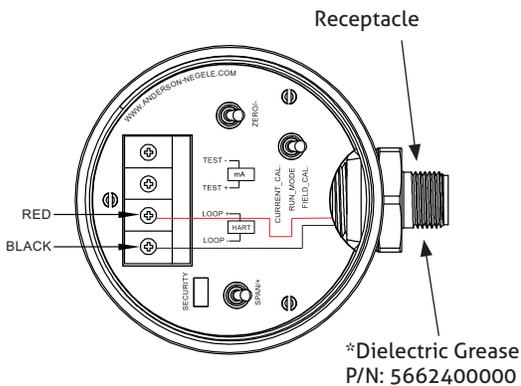


Field Wireable Connector
P/N: 42119B0000 (without cable)




90° Field Wireable Connector
P/N: 42119A0000 (without cable)




Molded Cordset

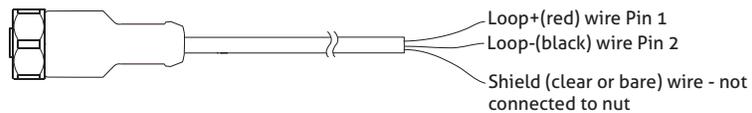

Shield Cordset



Order Information



SPAN RANGE

- 1 0-30" min to 0-140" max with Hart
- 2 0-140.1" to 0-415" max with Hart
- 3 0-415.1" to 0-830" max with Hart
- 4 0-830.1" to 0-1385" max with Hart
- 5 0-30" min to 0-140" max
- 6 0-140.1" to 0-415" max
- 7 0-415.1" to 0-830" max
- 8 0-830.1" to 0-1385" max

FITTING

- 089 Anderson Flush Mount Long (71060-A3, A5, A7, A9)
- 088 Anderson Flush Mount Short (71060-A4, A6, A8)
- 091 Cherry Burrell Flush Mount Long (insulated tank)
- 090 Cherry Burrell Flush Mount Short (uninsulated tank)
- 092 King Gage Flush Mount Long³ (1777-3)
- 093 King Gage Flush Mount Medium (1777-1, -6 Standard)
- 094 King Gage Flush Mount Short (1777-2 non-insulated)
- 097 Tank Mate Flush Mount Long^{1,3} (208WVE)
- 096 Tank Mate Flush Mount Medium¹ (205WVE)
- 095 Tank Mate Flush Mount Short¹ (200WVE)
- 004 1-1/2" Tri-Clamp
- 005 2" Tri-Clamp
- 007 3" Tri-Clamp
- 059 1-1/2" NPT^{3,4}
- 147 Continental (long)
- 146 Continental (short)³
- 141 Rosemount / Foxboro Sanitary Spud - Short³
- 142 Rosemount / Foxboro Sanitary Spud - Long³
- 154 Endress & Hauser Universal Adaptor - Short
- 155 Endress & Hauser Universal Adaptor - Long
- 169 Liquid Scale Flush Mount Medium^{2,3}

MATERIALS OF CONSTRUCTION

- 1 SS-316L Electropolished, Plastic Cap
- 2 Hastelloy "C" Diaphragm, Plastic Cap⁴
- 3 SS-316L Electropolished Diaphragm, Stainless Steel Cap
- 4 Hastelloy "C" Diaphragm, Stainless Steel Cap⁴

¹ Requires Tank Mate Shell Adapter: 57200A0001 (insulated) 57200A0002 (uninsulated)
² Requires Liquid Scale Shell Adaptor: 4593600000
³ Sensors with these fittings are non-cancellable/ non-returnable for credit
⁴ N/A with King-Gage, Tank Mate, or Endress & Hauser fittings

***Note:**
 Calibration of span is in units "inches water column".
 Consult factory for assistance.

****Note:**
 Orders not accepted without calibration data or completed worksheet.

CALIBRATION **

Height in inches w.c.* (to nearest tenth)
 00000 Field Calibrated

Examples:

10850 1,085.0 inches
 00305 30.5 inches

SENSOR WIRING

- 01 Quick Disconnect Receptacle (QDR) & Field Wireable Connector (FWC) w/No Cable (std.)
- R0 QDR & 90° FWC w/No Cable
- 00 QDR w/No Cable, no FWC
- 05 QDR w/25 ft Standard Molded Cordset
- 10 QDR w/50 ft Standard Molded Cordset
- 20 QDR w/100 ft Standard Molded Cordset
- 99 1/2" NPT No QDR, no FWC and no Cable (No sensor warranty for water damage)

MOUNTING

- 0 Horizontal
- 1 Vertical
- 2 Other (specify angle from vertical or from horizontal)

ACCESSORIES

- Anderson Weld-In Shells for Flush Mount Level Transmitters
- 71060A0003 Insulated Vessel - Standard Flange - 316L
 - 71060A0004 Uninsulated Vessel - Standard Flange - 316L
 - 71060A0005 Insulated Vessel - Pressure Vessel Flange - 316L
 - 71060A0006 Uninsulated Vessel - Pressure Vessel Flange - 316L
 - 71060A0009 Insulated Vessel - H/D Press. Vessel Flange - 316L
 - 4600300007 Plastic Cap, Grey
 - 5632900001 Stainless Steel Cap
 - SP5633200000 1/2" NPTF Adaptor
 - 36240S0036 O-R 2.364 ID X .070 TH SLC 70S
 - 36240S0141 O-R 2.300 ID X .103 TH SLC 70S
 - 56642A0002 M12xM16 CONN KIT, SL/LD
- Note: For SL units prior to Serial Number 2250287, replace with part number 56642A0001 M12x1/2"NPT CONN KIT.

Shell Adaptor

- Tank Mate, uninsulated 57200A0002
- Tank Mate, insulated 57200A0001

Gaskets for Flush Mount Level Transmitters

- Anderson 44348A0001
- Cherry Burrell 44292A0001
- King Gage 36240S3212
- Tank Mate 36240S3123
- Continental 5658900000
- Rosemount 36240S3341


Sensor Calibration Adaptors

- Anderson fitting 73198A0001
- Cherry Burrell fitting 73198A0002
- King Gage Fitting 73198A0003
- Tankmate 73198A0004


Cord Sets

- Molded w/25' cable 42117K0025
- Molded w/50' cable 42117K0050
- Molded w/100' cable 42117K0100
- 5-Conductor w/25' cable 42117H0025
- 5-Conductor w/50' cable 42117H0050
- 5-Conductor w/100' cable 42117H0100


Sensor Fittings and Dimensions

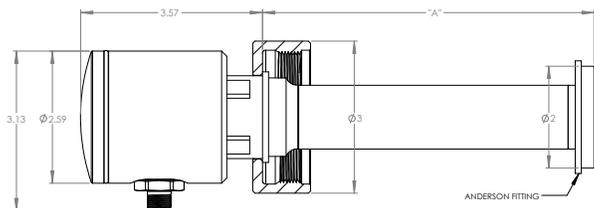


ANDERSON SHELL TYPE	"A"
NON-INSULATED	2-3/16"
INSULATED	6-1/2"

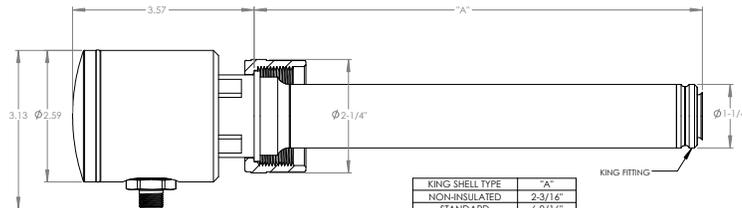





KING SHELL TYPE	"A"
NON-INSULATED	2-3/16"
STANDARD	6-9/16"
LONG	8-13/16"

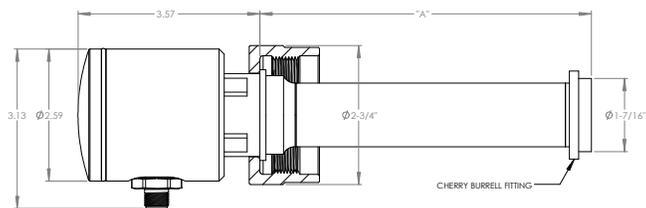


CHERRY BURRELL SHELL TYPE	"A"
NON-INSULATED	2-3/16"
INSULATED	6-1/2"

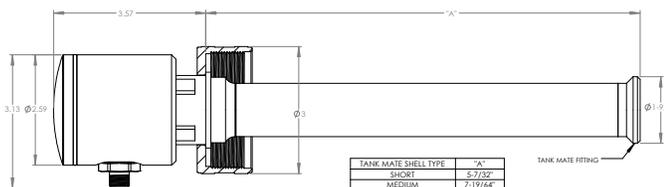

TANK MATE SHELL TYPE	"A"
SHORT	5-7/32"
MEDIUM	7-19/64"
LONG	10-3/16"

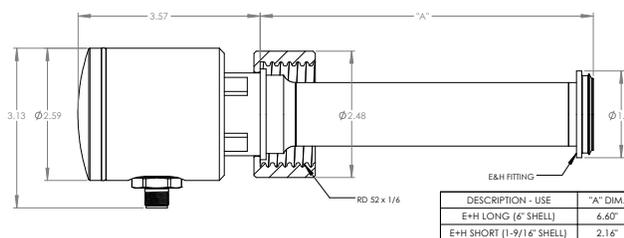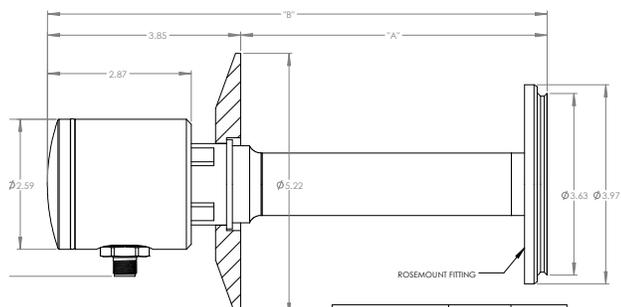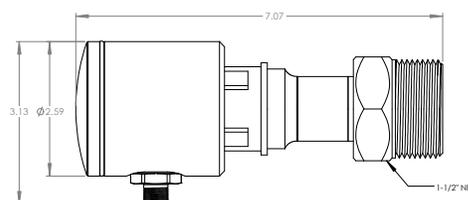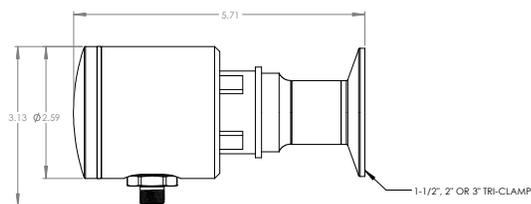

DESCRIPTION - USE	"A" DIM.
E+H LONG (6" SHELL)	6.60"
E+H SHORT (1-9/16" SHELL)	2.16"

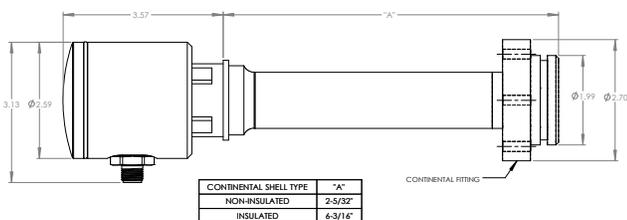

CONTINENTAL SHELL TYPE	"A"
NON-INSULATED	2-5/32"
INSULATED	6-3/16"

05006 / 2.7 / 2023-03-07 / NV / NA

ANDERSON INSTRUMENT COMPANY
156 Auriesville Road
Fultonville, NY 12072

Phone 800-833-0081
Fax 518-922-8997
info@anderson-negele.com

Tech. Support:
techservice@anderson-negele.com
Phone 800-833-0081